


4 LOAD CELL MILD STEEL SCALES

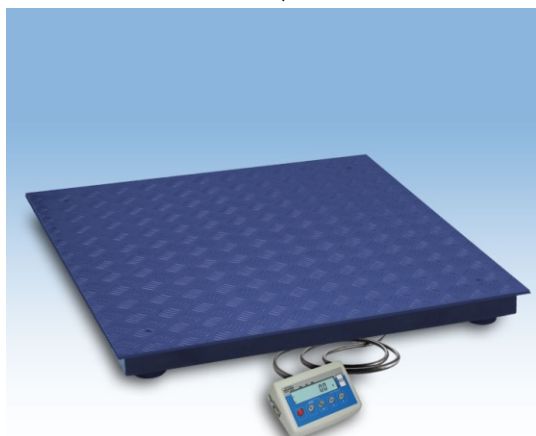

Measurement with application of 4 load cells is a guarantee of precise readout, no matter of place of loading the mass on the weighing pan.

This platform scales with 4 load cells are manufactured in mild steel technology. Measuring indicator PUE C/31 with backlit LCD display is installed on 3 m cable with possibility of hanging in on wall.

Scales are powered from mains or by batteries (6xAA), RS 232 output is offered as standard.



Counting pieces



Checkweighing



Summing function

Technical data:

	WTC/4 600C6	WTC/4 1500C7	WTC/4 1500C8	WTC/4 3000C8	WTC/4 1500C8/9	WTC/4 3000C8/9
Max capacity	600 kg	1500 kg	1500 kg	3000 kg	1500 kg	3000 kg
Readability	0,2 kg	0,5 kg	0,5 kg	1 kg	0,5 kg	1 kg
Tare range	-600 kg	-1500 kg	-1500 kg	-3000 kg	-1500 kg	-3000 kg
Pan size	800×800 mm	1000×1000 mm	1200×1200 mm	1200×1200 mm	1200×1500 mm	1200×1500 mm
Working temperature	-10° - +40 °C					
Output signal	RS 232					
IP rating	IP 65 construction, IP 54 indicator					
Power supply	230V AC, 50Hz / 11V AC and (6xAA)					
Display	LCD (backlit)					

Technical data:

	WTC/4 1500C9	WTC/4 3000C9	WTC/4 3000C10	WTC/4 3000C11	WTC/4 6000C11	WTC/4 10000C14
Max capacity	1500 kg	3000 kg	3000 kg	3000 kg	6000 kg	10000 kg
Readability	0,5 kg	1 kg	1 kg	1 kg	2 kg	2 kg
Tare range	-1500 kg	-3000 kg	-3000 kg	-3000 kg	-6000 kg	-10000 kg
Pan size	1500×1500 mm	1500×1500 mm	1500×2000 mm	2000×2000 mm	2000×2000 mm	2300×5000 mm
Working temperature	-10° - +40 °C					
Output signal	RS 232					
IP rating	IP 65 construction, IP 54 indicator					
Power supply	230V AC, 50Hz / 11V AC and (6xAA)					
Display	LCD (backlit)					

Additional equipment:

RACK FOR HEAD	RAMPS FOR LOW PROFILED SCALE
LCD ADDITIONAL DISPLAY	COMPUTER SOFTWARE: PW-WIN, RAD-KEY, REC-FS, LS-FS
LARGE SIZE ADDITIONAL DISPLAY	RS 232/RS 485 CONVERTER
"KAFKA" THERMAL PRINTER	EXTERNAL POWER OUTPUT
NEEDLE PRINTER "EPSON"	