WPW/D/H DOSING SCALES

Dosing scales are equipped with measuring indicator PUE C41H and stainless steel weighing platform. Dosing system is connected with external automatic system, equipped with steering and performing devices. These devices enable automatic, semi-automatic and manual dosing of liquids and lose materials. Moreover the system enables preparation of mixtures from gathered components (dosing exits). Ingredients have assigned nominal masses, which are measured by the system during dosing process.

Dosing system options:
- possibility to rescale masses of formula ingredients (multiplayer of formula mass).
- Possibility to set particular ingredients tare mode during dosing or formula making time.
- Possibility to set the way of ingredient's mass acceptance after weighing (manual or automatic)
- Possibility to declare of cycle numbers for specific formula,
- Possibility to stop the formula or dosing process at each stage of advance
- Possibility to work with external buttons: TARA, ZERO, PRINT, START, STOP, (START/STOP) CHUTE and free configuration of inputs assigned to the button,
- Free configuration possibility of output numbers for the following functions; MIN, OK., MAX, STABIL, CHUTE P1, CHUTE P2, WORK,
- Printout from formula and dosing process
- Program is equipped with standard printout form for reports, which consists of following inforation: date and time of the report, operator's name, formula's name, formula's code, formula's mass, mode, formula's status, assortment's name, assortment's ID, assortment's mass, assortment's setting, assortment's deviation,
- Access to operator's, assortment's formula's, weighing's, universal variables, and tare databases.

Counting pieces
Checkweighing
Summing function
Filling
Animal weighing
Percentage
Statistics
Caps lock of max indication
Measurement in Newton

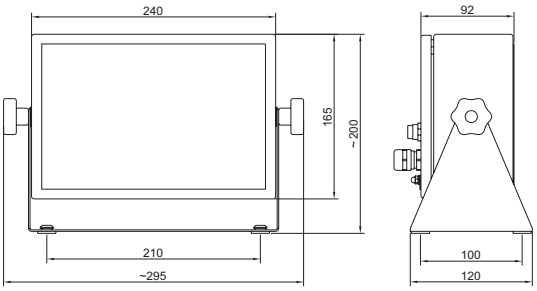

Technical data:

	WPW/D 3 H1/K	WPW/D 6 H2/K	WPW/D 15 H2/K	WPW/D 15 H3/K	WPW/D 30 H3/K	WPW/D 60 H3/K	WPW/D 150 H3/K
Max capacity	3 kg	6 kg	15 kg	15 kg	30 kg	60 kg	150 kg
Readability	1 g	2 g	5 g	5 g	10 g	20 g	50 g
Tare range	-3 kg	-6 kg	-15 kg	-15 kg	-30 kg	-60 kg	-150 kg
Pan size	150×200 mm	250×300 mm	250×300 mm	410×410 mm	410×410 mm	410×410 mm	410×410 mm
Working temperature	-10° - +40 °C						
Output signal	RS 232, RS 485						
IP rating	IP 66/67						
Power supply	230V AC, 50Hz						
Display	LCD						

Technical data:

	WPW/D 60 H4/K	WPW/D 150 H4/K	WPW/D 60 H5/K	WPW/D 150 H5/K	WPW/D 300 H5/K	WPW/D 150 H6/K	WPW/D 300 H6/K
Max capacity	60 kg	150 kg	60 kg	150 kg	300 kg	150 kg	300 kg
Readability	20 g	50 g	20 g	50 g	100 g	50 g	100 g
Tare range	-60 kg	-150 kg	-60 kg	-150 kg	-300 kg	-150 kg	-300 kg
Pan size	500×500 mm	500×500 mm	600×600 mm	600×600 mm	600×600 mm	800×800 mm	800×800 mm
Working temperature	-10° - +40 °C						
Output signal	RS 232, RS 485						
IP rating	IP 66/67						
Power supply	230V AC, 50Hz						
Display	LCD						