

# WPW/E/H LABELING SCALES



Labeling systems are equipped with measuring indicator PUE C41H and stainless steel weighing platform.

The labeling system is designed for labels printing, which are used for marking packed goods for example in packaging process.

Program can generate:


- standard labels for single goods,
- collective labels for containers with single goods,
- great collective labels for containers packed with containers,

Software enables date bases management from PC level. Finding specific good in a date base with bare code scanner increases measuring indicator's functionality.

Software characteristic:

- three modes of label printing (manual, label counting state, set value of assortment- release),
- control scale function (+/- weighing control)
- EAN 13 and EAN 128 code assortment identification,
- access to date base of operators, assortments, universal variables, tares, weighings, contractors and components.

Measuring indicator can work with Software "EDYTOR WPW" and "EDYTOR ETYKIET". The communication with computer through RS 235, RS 485 (2400-115200 bit/s) or ETHERNET.

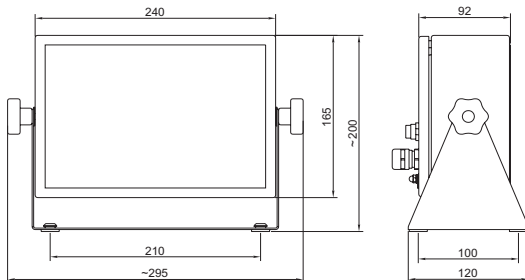

- Counting pieces
- Checkweighing
- Summing function
- Filling
- Animal weighing
- Percentage
- Statistics
- Caps lock of max indication
- Measurement in Newton

## Technical data:

	WPW/E 3 H1/K	WPW/E 6 H2/K	WPW/E 15 H2/K	WPW/E 15 H3/K	WPW/E 30 H3/K	WPW/E 60 H3/K	WPW/E 150 H3/K
Max capacity	3 kg	6 kg	15 kg	15 kg	30 kg	60 kg	150 kg
Readability	1 g	2 g	5 g	5 g	10 g	20 g	50 g
Tare range	-3 kg	-6 kg	-15 kg	-15 kg	-30 kg	-60 kg	-150 kg
Pan size	150×200 mm	250×300 mm	250×300 mm	410×410 mm	410×410 mm	410×410 mm	410×410 mm
Working temperature	-10° - +40 °C						
Output signal	RS 232, RS 485						
IP rating	IP 66/67						
Power supply	230V AC, 50Hz						
Display	LCD						

## Technical data:

	WPW/E 60 H4/K	WPW/E 150 H4/K	WPW/E 60 H5/K	WPW/E 150 H5/K	WPW/E 300 H5/K	WPW/E 150 H6/K	WPW/E 300 H6/K
Max capacity	60 kg	150 kg	60 kg	150 kg	300 kg	150 kg	300 kg
Readability	20 g	50 g	20 g	50 g	100 g	50 g	100 g
Tare range	-60 kg	-150 kg	-60 kg	-150 kg	-300 kg	-150 kg	-300 kg
Pan size	500×500 mm	500×500 mm	600×600 mm	600×600 mm	600×600 mm	800×800 mm	800×800 mm
Working temperature	-10° - +40 °C						
Output signal	RS 232, RS 485						
IP rating	IP 66/67						
Power supply	230V AC, 50Hz						
Display	LCD						