










PRECISION BALANCES PARTNER APP/2Y



Precise balances of APP/2Y are the response for the growing market demands concerning simple operation and maximum automation of the weighing process.

Balances equipped in a new electronic modules and are operated using a touch panel covering a 5,7" colour graphic display. Y scales have implemented new easily operated software.

-  Counting pieces
-  Filling
-  Animal weighing
-  Density determination
-  Checkweighing
-  Percentage
-  Statistics
-  Formulation

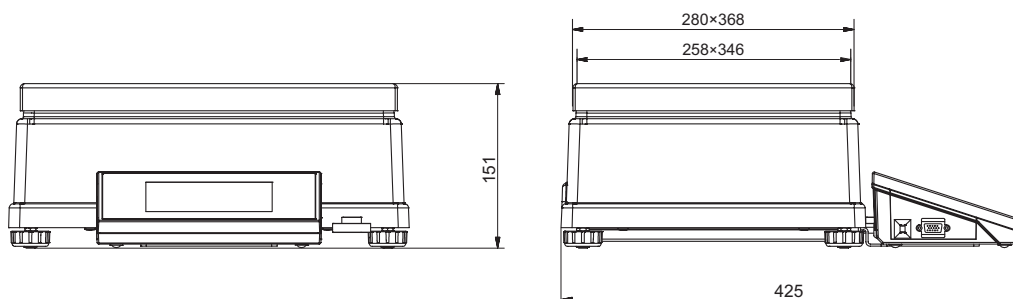

Technical data:

	APP 25/2Y*	APP 35/2Y*	APP 50/2Y/1
Max capacity	25 kg	35 kg	50 kg
Readability	0,1 g	0,1 g	0,1 g
Tare range	-25 kg	-35 kg	-50 kg
Repeatability		0,1 g	0,15 g
Linearity		±0,1 g	±0,5 g
Calibration		external	
Pan size		346 × 258 mm	
Working temperature		+15° - +40 °C	
Operation time		1,5 s	
Power supply		110 ÷ 230 V AC / 50 ÷ 60 Hz / 13,5 ÷ 16 V AC / 1,1 A	
Calibration weight		10 kg	
Display		5,7" touch screen	
Interface		2×USB, RS 232, Ethernet, 2in/2out (digital)	

*verified balances

Additional equipment:

Antivibration table for laboratory balances	Power adapter with battery and charger ZR-02
Kafka thermal printer	Standard mass
Dot matrix Epson printer	Power loop module AP2-1
Label printer Citizen	Antistatic cable
Tare and "Print" foot button	Bar code scanner
PW-WIN computer software	Cable RS 232 (scale - Kafka printer) "P0136"
RAD-KEY computer software	Cable RS 232 (scale - computer) "P0108"
Additional LCD display "WD-3/01/Y"	Cable RS 232 (scale, Epson , Citizen printer) "P0151"
PC keyboard	

PARTNER CORPORATION

Str. Mures nr.63,Bucuresti ,Sector 1 * Tel/fax : 021-2242257 * e-mail:office@partner.com.ro * www.partner.com.ro